



Innovative **Technology**
for a **Connected** World

RD2458-5-OTDR

Tri-Band Omnidirectional Outdoor Antenna



TRI-BAND 2400/5300/5800 MHZ OPERATION OUTDOOR ANTENNA

Laird Technologies' Tri-Band RD2458-5-OTDR series antennas are high-gain (3dB @ 2.4GHz and 5dBi @ 5GHz) omnidirectional antennas designed for outdoor use. They are rugged and reliable. The antenna features a 360 degree horizontal transmission pattern and a 90 degree vertical transmission pattern.

FEATURES

- Tri-Band operation: 2.4GHz, 5.3GHz, 5.8GHz
- Extends range of wireless access points or wireless bridges
- N male connector

MARKETS

- 2.5,5.3GHz Wireless Access Points
- 2.5,5.3GHz Wireless Client Bridges
- 2.5,5.3GHz Wireless Routers
- Public safety wireless systems
- 802.11a/b/g wireless equipment

global solutions: local support.™


Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANTENNA PATTERNS

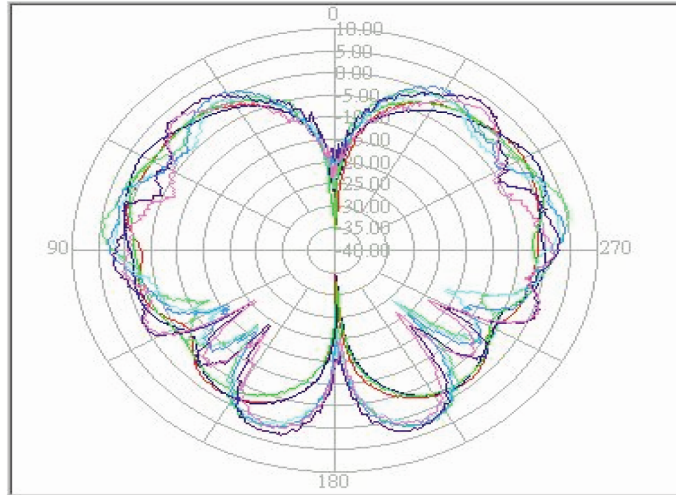

Freq (MHz)	peak (dBi)	Angle (o)	Avg (dBi)
2400.00	1.63	58.12	-2.24
2450.00	3.26	63.75	-1.75
2500.00	1.57	68.12	-2.33
5150.00	5.36	77.50	-0.63
5250.00	2.96	81.25	-1.93
5350.00	4.24	83.12	-1.05
5725.00	3.83	39.37	-0.57
5850.00	2.59	315.00	-2.10

SPECIFICATIONS

Part Number:	RD2458-5-OTDR
Frequency GHz:	2.4-2.5. 5.15-5.35 5.725-5.85 MHz
Gain:	2.0 dBi @2GHz 4.0 dBi @5GHz
3 dB Beamwidth-Azimuth:	Omnidirectional
3 dB Beamwidth-Elevation:	90°
Polarization:	Linear Vertical
VSWR:	2.0:1
RF Connector:	N (m) Reverse TNC
Power Rating:	10 W
Impedance	50 Ohm
Dimensions (mm):	7.6" x .05" (193 x 12.7)
Weight:	45.4g
Operational Temperature:	-10°C to +70°C
Mount Style:	Direct
RoHS:	Compliant

SYSTEM ORDERING INFORMATION

RD2458-5-OTDR-NM TriBand 2.4/5.3/5.8GHz Omnidirectional – N male connector

NOTES

- All shipments F.O.B. Schaumburg, IL 60173
- All antennas carry a 2 Year Warranty

ANT-SPEC-RD2458-5-OTDR-0409

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. All Laird Technologies' products are sold pursuant to the Laird Technologies' domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© 2009 All Rights Reserved
Laird Technologies is a registered trademark of Laird Technologies, Inc