

global solutions :
local support™

Flat Panel Wide Band Antenna 5150 to 5825 MHz Operation

The 5GHz wideband flat panel directional antennas by Laird Technologies offer high gain in a thin low profile package. The antennas are constructed of a gray color UV resistant ABS plastic radome with an aluminum backplate. The antenna can be used in horizontal or vertical polarization. The die cast aluminum bracket affords +/- 45 deg up or down tilt adjustment and the stainless steel hardware assures a long service life. The antenna can be surface mounted or pole mounted. The antenna comes with an integral N female connector standard.

Features and Benefits:

- High gain / low profile / wide band
- Pole mount or surface mount
- Rugged and weatherproof
- Vertical or horizontal polarization
- Type N female connector

Applications

- 5GHz wireless LAN applications
- Client antennas
- 802.11a applications
- OEM wireless data

For sales information:

Telephone 800-323-3757

E-Mail sales@pacwireless.com

or visit: www.pacwireless.com

Specifications

Parameter	Model	Min	Typ	Max	Units
Frequency Range		5150		5825	MHz
Gain	PA58-19 PA58-24		19 24		dBi
Horizontal Beamwidth	PA58-19 PA58-24		16 8		Deg
Vertical Beamwidth	PA58-19 PA58-24		16 8		
Front to Back	PA58-19 PA58-24	30 40			dB
Cross Polarization		25			dB
VSWR	5150-5350MHz 5470-5825MHz		2.0:1 1.5:1		
Impedance			50		OHM
Input Power				100	W
Operating Temperature		-40		+70	Deg C
Pole Size		1" (25)		2.5" (64)	In (mm)
Weight	PA58-19 PA58-24	17.6 (0.5) 60 (1.7)			oz (kg)
Dimension (L x W x Thick)	PA58-19 PA58-24	7.5" x 7.5" x 0.8" (190 x 190 x 20) 15.4" x 14.6" x 0.8" (390 x 371 x 21)			In (mm)
Bracket Tilt			45		Deg

Wind Loading (Lbs.)

Model	Sq. In	100MPH	125MPH	100MPH with 1/2" radial ice
PA58-19	56	14 lbs	22 lbs	14 lbs
PA58-24	163	41 lbs	64 lbs	41 lbs

System Ordering:

PA58-19 WideBand 5.1 to 5.8GHz 19dBi flat panel directional antenna

PA58-24 WideBand 5.1 to 5.8GHz 24dBi flat panel directional antenna



Notes:

- All shipments F.O.B. Schaumburg, IL 60173
- All antennas carry a 2 Year Warranty

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

Specifications subject to change without notice.

Antenna Patterns

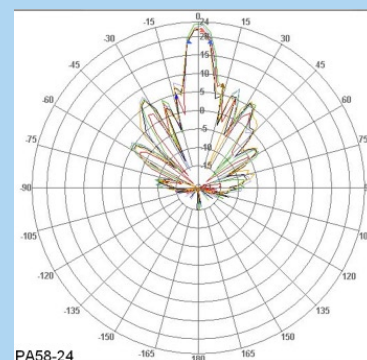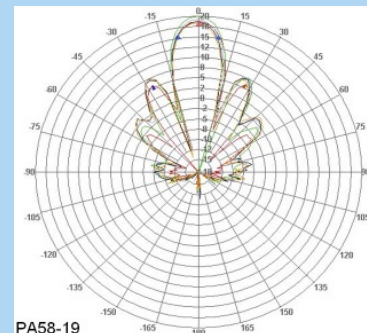

PA58-19
Surface Mount

